

## FERRO KlassikPlus

THE BESTSELLER  
FOR SECURITY AND COMFORT.



New  
decors and  
sizes




5-ply faces



Exterior grade  
MDF faces




Flat steel  
stabilizer



PU hard  
foam core



Robust  
construction



Laminated  
core



Reliable and safe door solutions  
[www.moralt-ag.com](http://www.moralt-ag.com)

TECHNICAL DETAILS

1/8 DOOR FRAME		
1 Framing/timber	Finger-jointed and laminated timber framing.	
8 Flat steel stabilizer	Lock-side patented flat steel stabilizer – thermally separated and sound insulated – to absorb tractive and shearing forces. Stabilizers are glued and friction-locked with the framework.	
Frame width/Options to shorten/Glass apertures	Thickness of door blank 68/78/88/98 mm	
	Frame width in mm	can be trimmed by
	Top	127 75*
	Side	lock-side 80/hinge-side 127 lock-side 25*/hinge-side 75*
	Bottom	127 85*
	Minimum distance for glass apertures on all 4 sides: 180 mm. The entrance width corresponds to the shortening dimension. When cut to minimum length at the bottom (85mm), a single rebate (max. 18 mm) or fitting of drop down seal is possible.	
2 INNER LAYER		
Construction	– Sandwich construction of laminated core (spruce) and HCFC-free and environmentally compatible PU hard foam – Surface stability through vertically aligned annual rings	
Bonding	Free of formaldehyde	
3-7 COVER BOARD		
Bonding	AW bonding according to DIN 68705 -2 – 5 layers (noble veneer, longitudinal) – 3 layers (cross grained veneer) = can be veneered individually Full-surface bonding with the overall construction	
EXTERNAL DOOR BLANK		
Model/finish	Cut and sanded	

\* with a max. rebate of 30 mm

CERTIFICATION

LENGTH IN MM	2,110/2,240/2,370/2,470/2,600			
WIDTH IN MM	950/1,050/1,150/1,230			
THICKNESS IN MM	68	78	88	98
DIFFERENT CLIMATE TESTING				
DIN EN 1121 : 2000-09	test climate c, d, e			
TOLERANCE CLASSES (by using three hinges)				
DIN EN 12219 : 2000-6	3 **			
THERMAL TRANSFER COEFFICIENT 2.240 X 1.050 MM				
U-value [W/m²K] DIN EN ISO 10077-2 : 2012-06	0,95	0,84	0,73	0,65
SOUND INSULATION				
DIN EN ISO 717-1 R <sub>w</sub> [dB]	30/38*			
BURGLAR-RESISTANCE				
DIN EN 1627 : 2011-09	RC2/RC3**			
WEIGHT: 2,240 X 1,050 MM KG/PIECE	62	70	72	78

\* model FERRO KlassikPlus Akustik on request

\*\* certified upto height 2,470 mm



PRODUCT RANGE

FERRO KLASSIKPLUS – 68 MM / 78 MM / 88 MM / 98 MM									
Length in mm	2,110 (1,950*)	2,240 (2,080*)	2,370 (2,210*)	2,470 (2,310*)	2,600 (2,440*)				
Width in mm	950	1,050	950	1,050	1,150	1,230	950	1,050	1,150
Mahogany	▲	●	▲	●	▲	▲	▲	▲	▲
Okoumé/Gabun	●	●	▲	●	▲	▲	▲	▲	▲
Meranti	▲	▲	▲	▲	▲	▲	▲	▲	▲
Oak	▲	●	▲	●	▲	▲	▲	▲	▲
Knotty oak	▲	▲	▲	▲	▲	▲	▲	▲	▲
Knotty oak 3.5 mm**	▲	▲	▲	▲	▲	▲	▲	▲	▲
Rustic knotty oak	▲	▲	▲	▲	▲	▲	▲	▲	▲
Pine	▲	▲	▲	▲	▲	▲	▲	▲	▲
Spruce	▲	▲	▲	▲	▲	▲	▲	▲	▲
Larch	▲	▲	▲	▲	▲	▲	▲	▲	▲
Knotty larch	▲	▲	▲	▲	▲	▲	▲	▲	▲
White fir	▲	▲	▲	▲	▲	▲	▲	▲	▲
Paint-grade	●	●	▲	●	▲	▲	●	▲	▲
MDF Exterior	●	●	●	●	●	●	●	▲	▲
CPL	▲	▲	▲	▲	▲	▲	▲	▲	▲
FERRO KLASSIKPLUS – 66 MM / 76 MM / 86 MM / 96 MM									
Length in mm	2,110 (1,950*)	2,240 (2,080*)	2,370 (2,210*)	2,470 (2,310*)	2,600 (2,440*)				
Width in mm	950	1,050	950	1,050	1,150	1,230	950	1,050	1,150
Cross grained PV	▲	●	▲	▲	▲	▲	▲	▲	▲

\* minimal dimension \*\* cross-grain ● in stock up to 68 mm ▲ available in 5 working days PV = peeled veneer face

All veneer surfaces = cut veneer or fine-line


Further dimensions, sizes and facings on request.



Any Questions? Info-Hotline: +49 8026 92538-11 www.moralt-ag.com
Moralt AG, Obere Tiefenbachstraße 1, 83734 Hausham, Phone: +49 8026 92538-0, Fax: +49 8026 92538-40, E-Mail: info@moralt-ag.de


This information is according to the present state of knowledge and does not represent an assurance of properties. Existing laws and regulations are to be followed by the recipient of our products at his own responsibility. All information refers solely to products by Moralt AG.

FERRO KlassikPlus

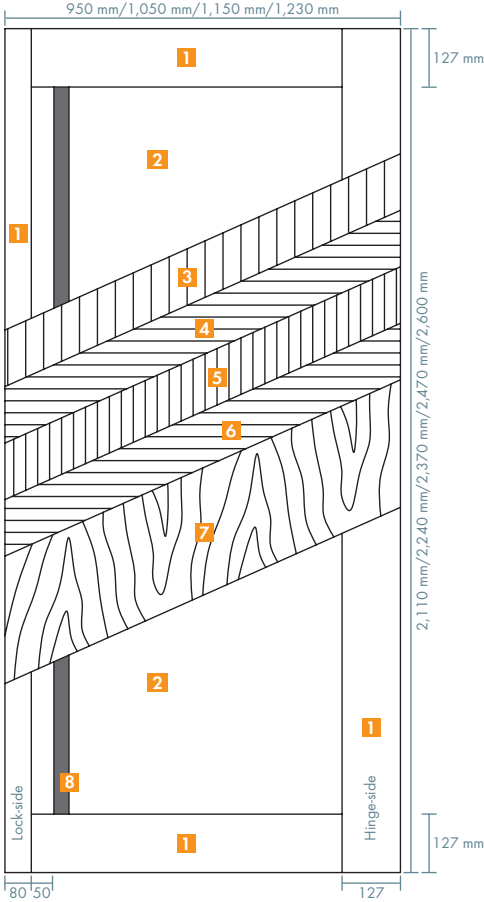


- 1 Framing/timber
- 2 Inner core layer in sandwich system/PU
- 3-7 Cover board
- 8 Flat steel stabilizer
- 9 PU hard foam

Cross-section view lock-side

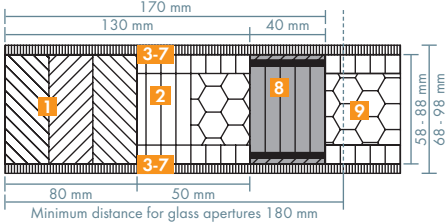

Cross-section view hinge side

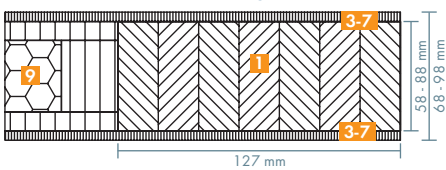

Despatch of single cargo

Direct delivery of a single piece to the manufacturer is possible.

CNC-processing service

All types may be delivered CNC processed.

Profi-Net timber distributor